
No.	Revision	Date	Name
1	PN Change from 1A-174-00	27/12/2013	B.G.YUN

RoHS Compliant

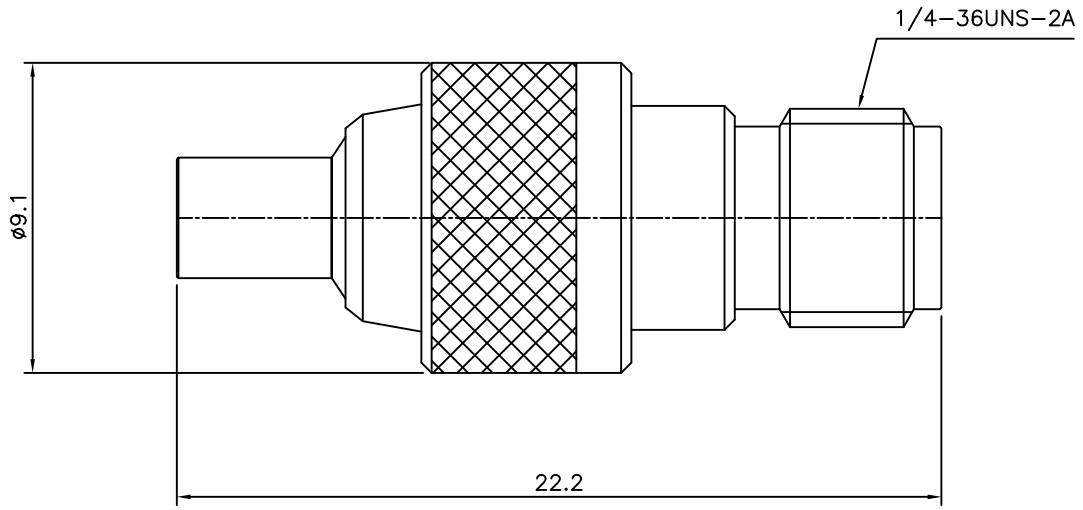

SPECIFICATIONS;

IMPEDANCE : 50 Ohms
Frequency Range : 0~6 GHz
Working Voltage : 170 VRMS
Insulation Resistance : 1000M ohms min.
Temperture Range : -65°~125°C
VSWR : DC~6 GHz : ≤1.20

Item	Materials	Plating
Body	Brass	Gold Plated
Center contact	Be-Cu	Gold Plated
Insulator	PTFE	-

SMA JACK to MMCX JACK
ADAPTOR

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	AD-1114-401	NAME	SMA(J)-MMCX(J) Adap.		APPROVED
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05 ANGLES ±1°		CHECKED
		SCALE	UNIT mm		DESIGNED S.J.LEE
CUSTOMER	DONGJIN TI.	DWG NO.	AD-1114-401		DATE. 26/MAR/2007