
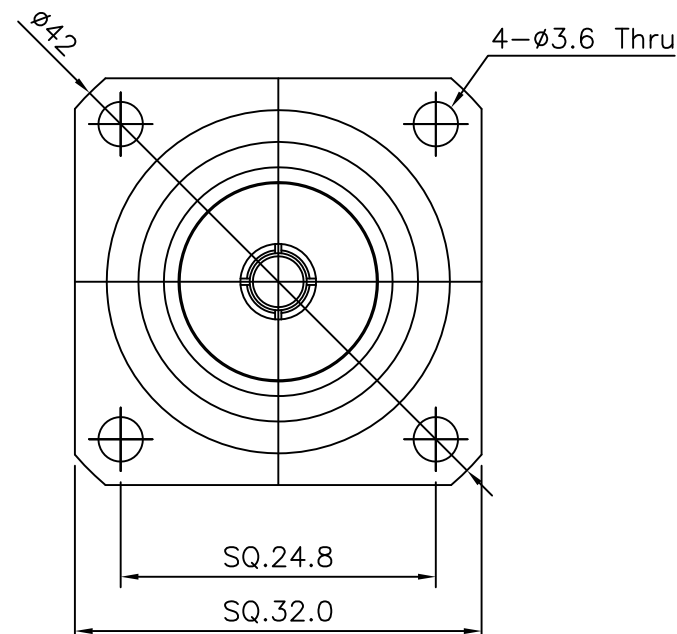


4	5	6
No.	Revision	Date
1	Inner structure change	12/DEC/2013
2		

RoHS Compliant

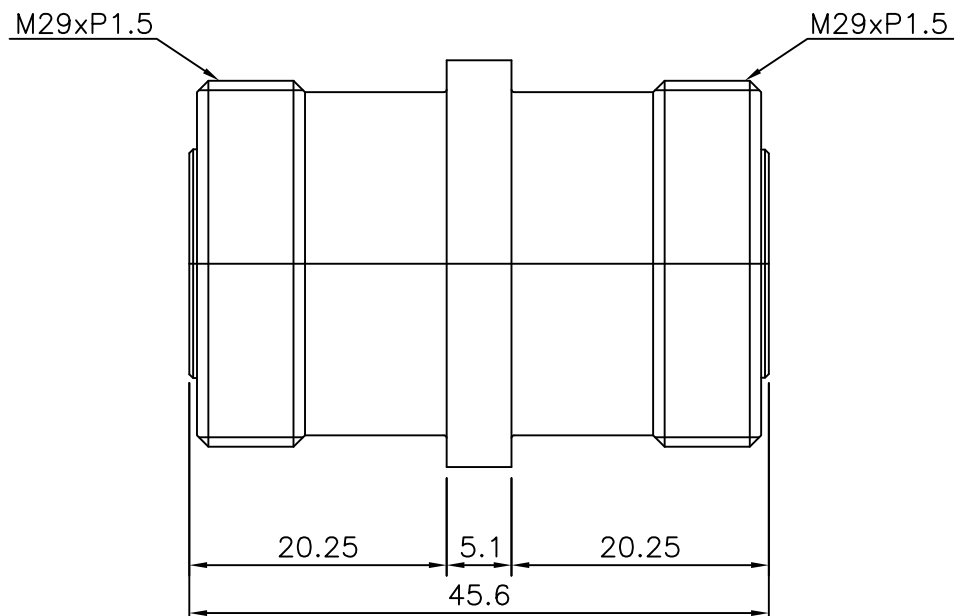

Environmental data

Frequency range : DC ~ 6GHz
V.S.W.R : 1.20 : 1 Max
PIMD : 165 dBc min(2x20W)
Operating Temperature : -45°C ~ 120°C

Connector parts	Materials	Finish
Body	Brass	Suco Plated
Center contact	Be-cu	Silver Plated
Insulator	TFEFLON	-

CUSTOMER

DIN TYPE(F) TO DIN TYPE(F) ADAPTOR

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	D716-803-004	NAME	DIN TYPE(F) TO DIN-TYPE(F) ADAP	APPROVED	K.Y.SON
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05	ANGLES ±1°	CHECKED
SCALE	UNIT	mm	DESIGNED	S.J.PARK	
DWG NO.	D716-803-004	DATE.	17/OCT/2013		



DONGJIN TI.