
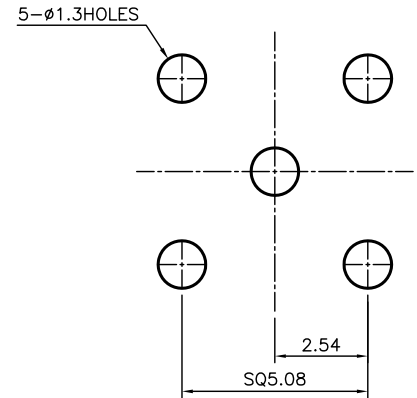



	~30	~50	~120	~200	~300	~500	~1,000	~2,000	2,000~
MACHINING	±0.05	±0.1	±0.2						
ASSEMBLY	±0.2	±0.3	±0.4						
ANGLE	±1°	±0°30'	±0°20'						
CABLE(Bending)	±1	±2	±3	±4	±5	±6			
CABLE(Flexible)	0~+5		0~+10			0~L*0.01			
CABLE(Signal)	+10			+20		+50			

No.	Revision	Date	Name
△			
△			

RoHS Compliant

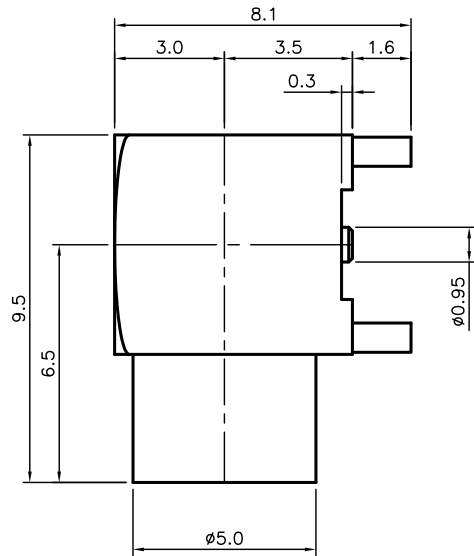

Electrical Data
 Impedance : 50ohm
 Frequency range : DC~6 GHz
 V.S.W.R : 1.3 Max
 DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VRMS
 TEMPERATURE RANGE: -45°C ~ +155°C

Item	Materials	Plating
Body	Brass	Gold Plated
Center contact	Be-Cu	Gold Plated
	Brass	Gold Plated
Insulator	PTFE	-

MCX-Raigt Angle
 JACK PCB Mount

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	MCX-608-017	NAME	MCX-LJ PCB		APPROVED K.Y.SON
MATERIAL	FINISH				CHECKED
		SCALE	UNIT mm		DESIGNED B.G.YUN
DONGJIN TI.		DWG NO. MCX-608-017		DATE. 11/AUG/2022	

CUSTOMER