No.	Revision	Date	Name
1	PN Change from 1X-111-00	26/SEP/2013	S.J.PARK

SPECIFICATIONS


Impedance ; 50ohm

Frequency ; DC~6GHz

Temperature range : −55°C to +155°C

2002/95/EC (RoHS) : Compliant

RoHS Compliant

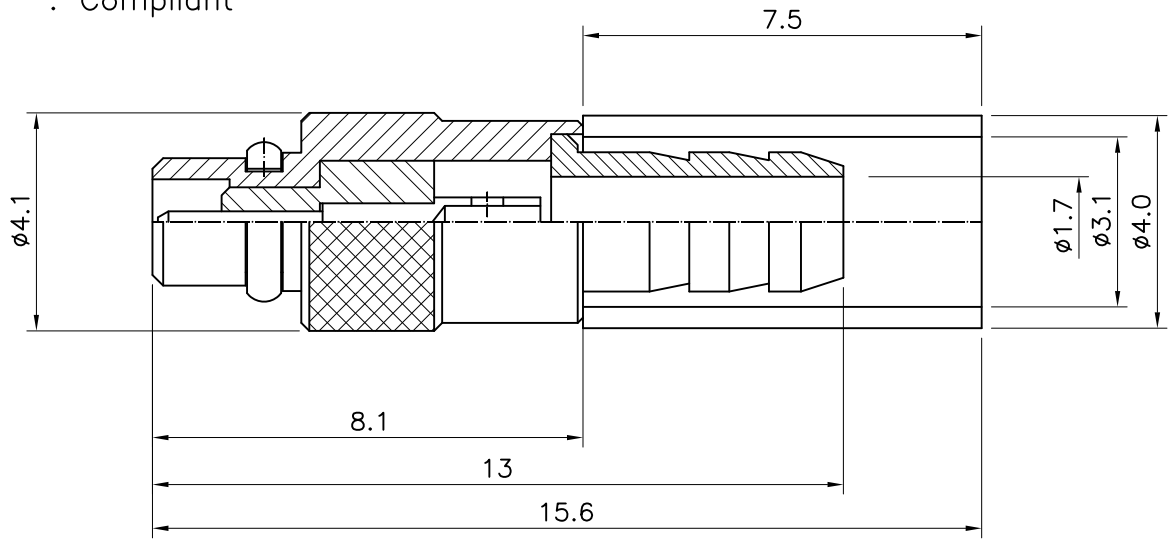

Item	Materials	Plating
Body	Brass	Gold Plated
C-Ring	Be-Cu	Gold Plated
Center contact	Brass	Gold Plated
Ferrule	Brass	Gold Plated
Insulator	PTFE	−

MMCX Straight Plug
for Cable-RG316

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No. MMCX-111-001		NAME MMCX-SP316			APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05 ANGLES ±1°			CHECKED
		SCALE	UNIT mm		DESIGNED S.J.LEE
DONGJIN TI.		DWG NO. MMCX-111-001			DATE. 2001.04.15

CUSTOMER