


4	5	6
No.	Revision	Date
△		
△		

RoHS Compliant

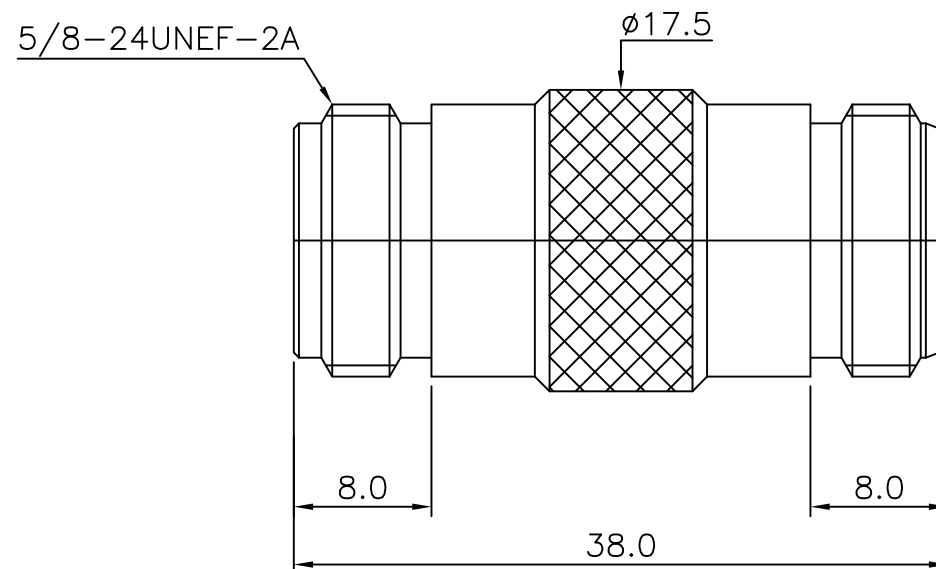

Environmental data

Frequency range : DC ~ 6GHz
V.S.W.R : 1.20 : 1 Max
PIMD : 155 dBc min(2x20W)
Operating Temperature : -45°C ~ 120°C

N-TYPE FEMALE TO FEMALE ADAPTOR

Item	Materials	Plating
Body	Brass	SUCO Plated
Center contact	BeCu	Silver Plated
Insulator	PTFE	—

CUSTOMER

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	N-803-004	NAME	N-FF Adaptor	APPROVED	
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05	ANGLES ±1°	CHECKED
SCALE	UNIT	mm	DESIGNED	S.J.LEE	
DWG NO.	N-803-004	DATE.	19/NOV/2007		

DONGJIN TI.