No.	Revision	Date	Name
1	PN Change from 1S-101-00	20/NOV/2013	S.J.PARK

SPECIFICATIONS

Impedance ; 50ohm


Frequency range ; DC~18GHz

Insertion loss ; 0.15dB max@18GHz

V.S.W.R ; 1.20:1 max@18GHz

Temperature range : -55°C to +155°C

RoHS Compliant

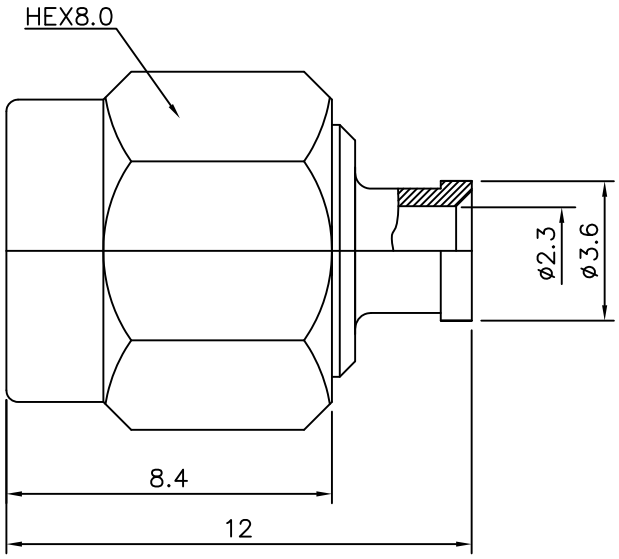

Connector parts	Materials	Finish
Coupling Cap	BRASS	Gold Plated
Body	BRASS	Gold Plated
Center contact	Brass	Gold Plated
Insulator	PTFE	-

SMA-Straight-PLUG for Cable-UT085

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No. SMA-101-001		NAME SMA-SP-085			APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05 ANGLES ±1°			CHECKED
		SCALE	UNIT mm		DESIGNED S.J.LEE
CUSTOMER	DONGJIN TI.	DWG NO. SMA-101-001			DATE. 30/NOV/2006