
No.	Revision	Date	Name
1	PN Change from 1S-1212S-3917	02/OCT/2013	S.J.PARK

SPECIFICATIONS

Impedance ; 50ohm
Frequency ; DC~6GHz
Voltage rating ; 375 VRMS
VSWR ; max 1.20:1 UP TO 6GHz
Temperature range : −55°C to +155°C
2002/95/EC (RoHS) : Compliant

RoHS Compliant

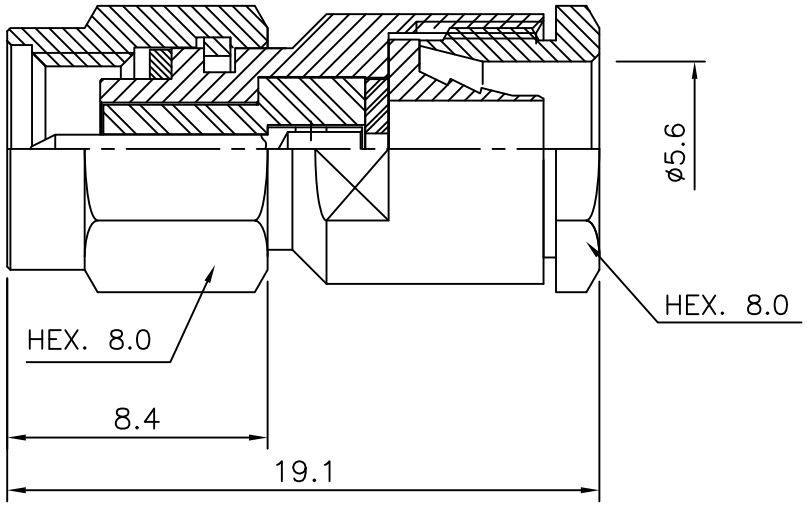

Connector parts	Materials	Finish
Coupling Cap	Stainless steel	Passivated
Body,Coupling Nut	Stainless steel	Passivated
Center contact	Brass	Gold Plated
Insulator	PTFE	−
Gasket	Silicone rubber	−
Cable ferrule	Brass	Gold Plated

SMA−Straight−PLUG CLAMP for Cable−RG142,400

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No. SMA−112−009		NAME SMA−SP−RG142 CLAMP			APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05 ANGLES ±1°			CHECKED
		SCALE N/S	UNIT mm		DESIGNED S.J.LEE
		DWG NO. SMA−112−009			DATE. 17/DEC/2010

CUSTOMER

DONGJIN TI.