


4	5	6	
No.	Revision	Date	Name
△	PN Change from 1S-504-15029	16/AUG/2013	B.G.YUN
△			

RoHS Compliant

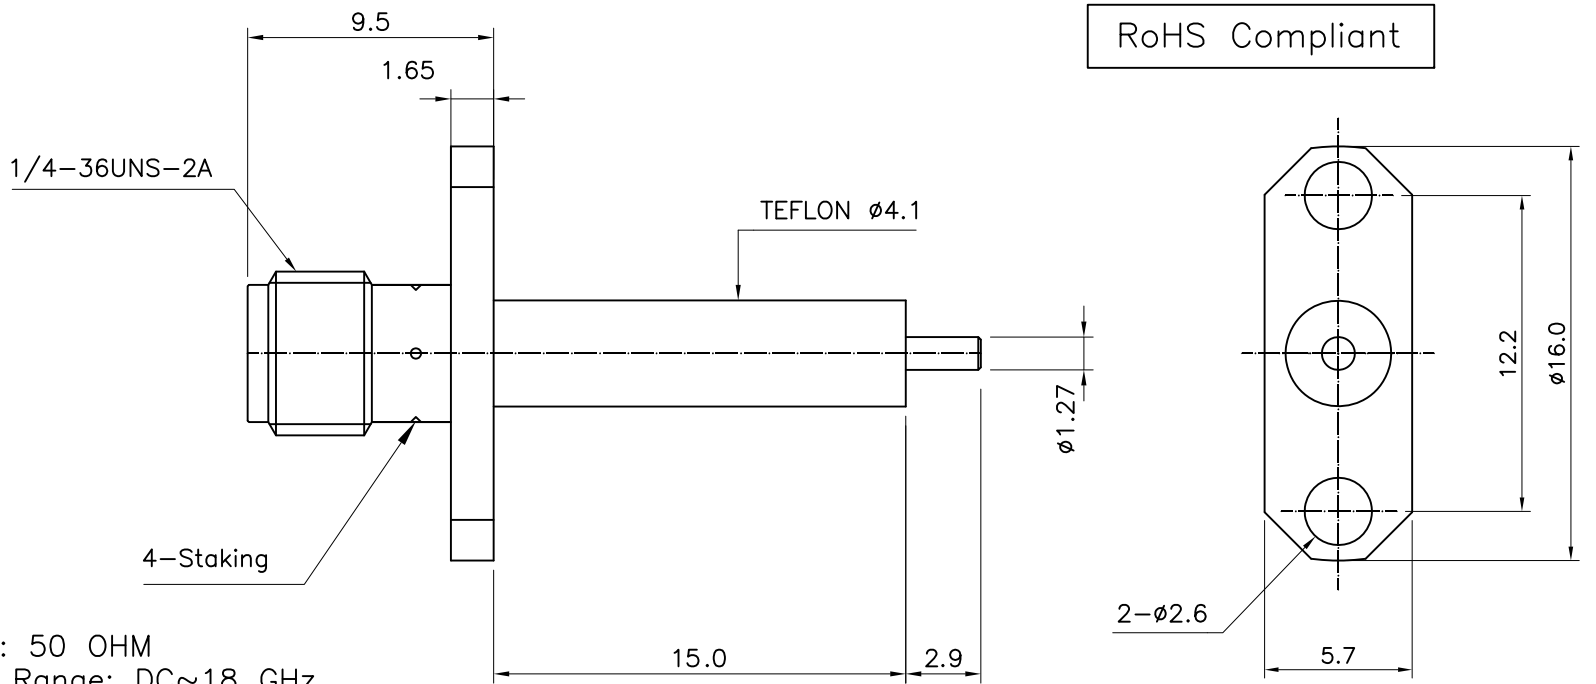

**SPECIFICATIONS**  
 Impedance: 50 OHM  
 Frequency Range: DC~18 GHz  
 Voltage rating: 500 Vrms  
 Dielectric Withstanding Voltage: 1500 Vrms  
 Durability: 500 Cycles  
 Contact retention 6lbs axial  
 Temperature Range: -40 °C to +165 °C

SMA-2H PANEL-FEMALE  
 MICRO COAXIAL END RECEPTACLE

Connector parts	Materials	Finish
Body	Brass	Gold Plated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

**CUSTOMER**

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SMA-502-004	NAME	SMA-2H-JACK RECEPTACLE		APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05		ANGLES ±1°	CHECKED
		SCALE	UNIT		DESIGNED S.J.LEE
			mm		DWG NO. SMA-502-004

