


4	5	6
No.	Revision	Date
1	PN Change from 1S-504SG-15029E	31/07/2013
2		B.G.YUN

RoHS Compliant

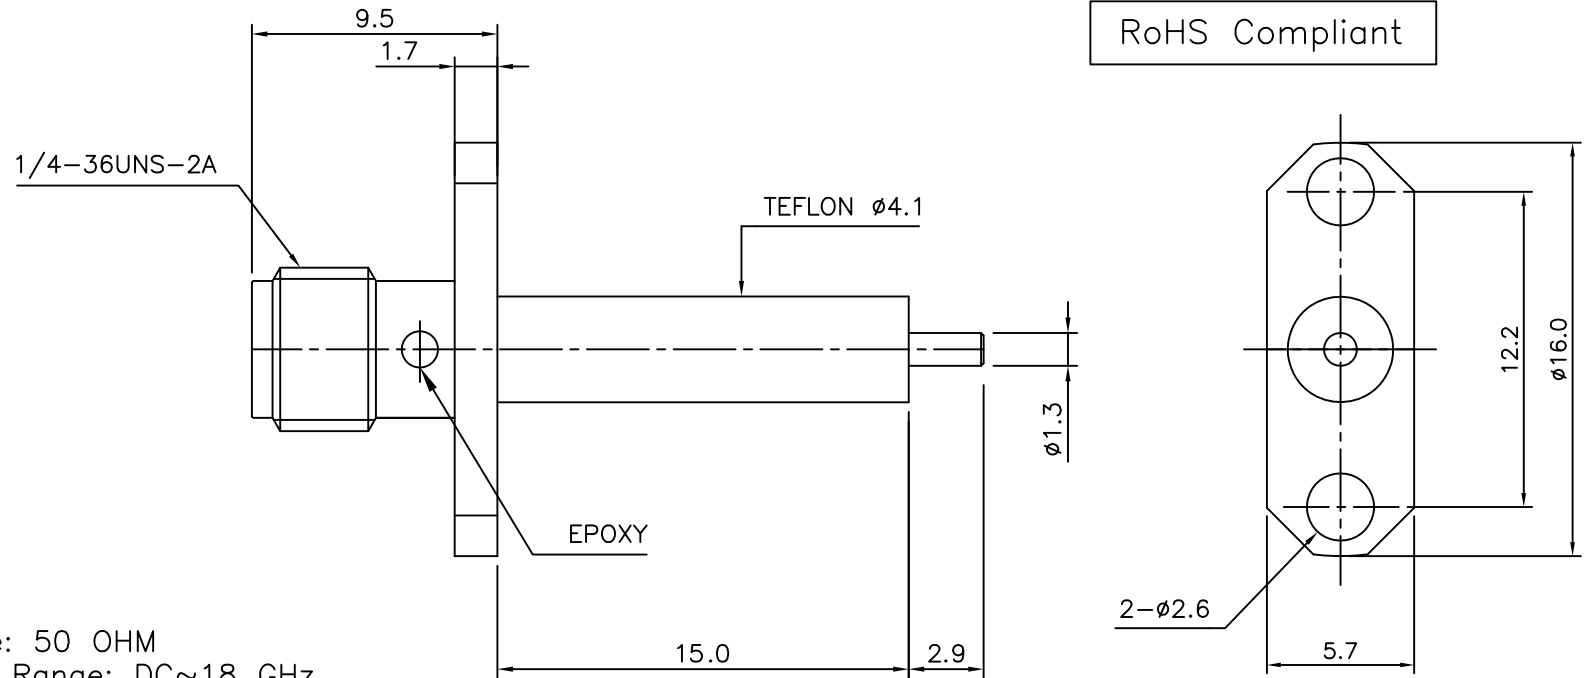

SPECIFICATIONS

Impedance: 50 OHM
Frequency Range: DC~18 GHz
Voltage rating: 500 Vrms
Dielectric Withstanding Voltage: 1500 Vrms
Durability: 500 Cycles
Contact retention 6lbs axial
Temperature Range: -4.0°C to +165°C
Insulation resistance: 5000MΩ

SMA-2H PANEL-FEMALE
MICRO COAXIAL END RECEPTACLE

Connector parts	Materials	Finish
Body	Stainless steel	Gold Plated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

CUSTOMER

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SMA-502-047	NAME	SMA-2H-JACK RECEPTACLE	APPROVED	
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05	ANGLES ±1°	CHECKED
SCALE	UNIT	mm	DESIGNED	S.J.LEE	
DWG NO.	SMA-502-047	DATE.	01/SEP/2009		



DONGJIN TI.