


1	2	3	4	5	6	
SPECIFICATIONS; IMPEDANCE : 50 Ohms Frequency Range :DC~20 GHz Directric Withstanding Voltage : 750 VRMS Insulation Resistance : 5000 meghms Temperture Range : -55~125°C VSWR : 1.05+0.01F. F Operating Frequency in GHz			No.	Revision	Date	Name
			△	PN Change from 1S-502S-F0050	17/FEB/2014	S.J.PARK
			△			

RoHS Compliant

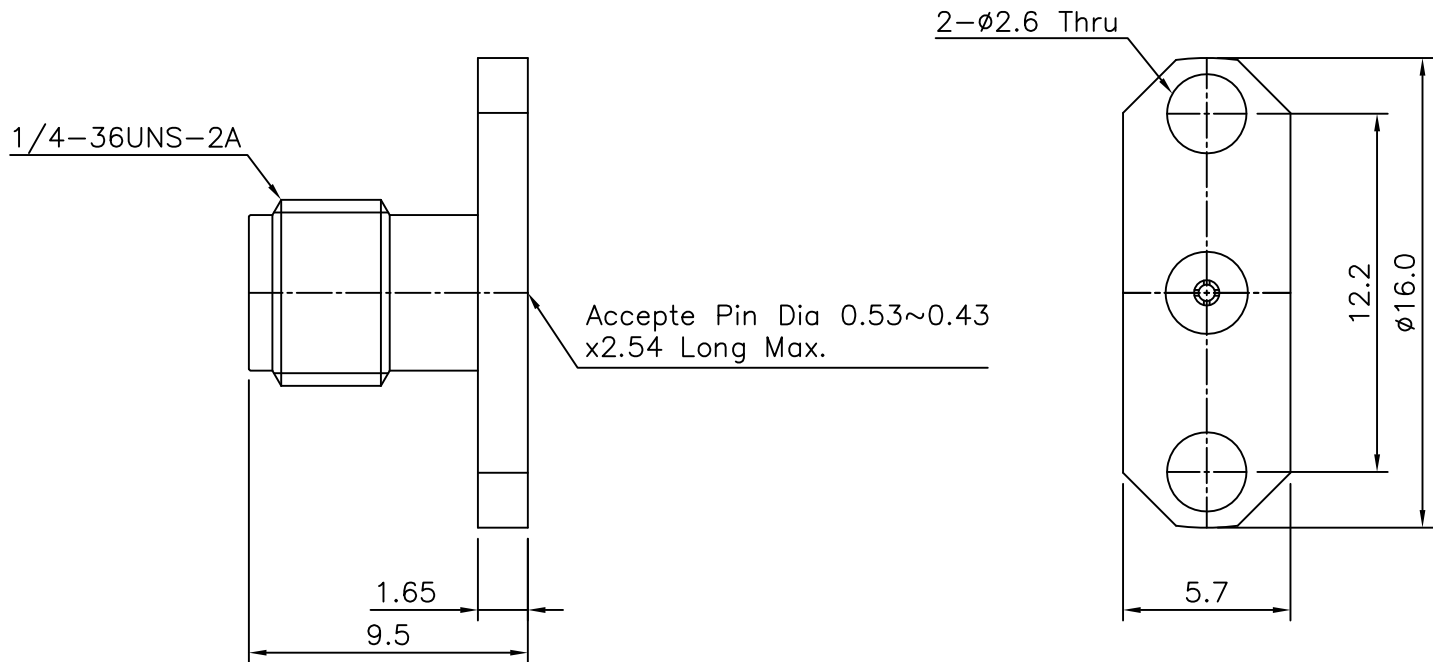

SMA-FEMALE-2Hole Panel
Field Replaceable.

Connector parts	Materials	Finish
Body	Stainless steel	Passivated
Center contact	Beryllium copper	Gold plated
Insulator	PTFE	-

NO.	DESCRIPTION		Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No. SMA-502-156			NAME SMA-F2H-Recep.		APPROVED	
MATERIAL		FINISH	TOLERANCES OTHERWISE SPEC. ± 0.05 ANGLES $\pm 1^\circ$			CHECKED
 DONGJIN TI.		SCALE	UNIT mm		DESIGNED S.J.LEE	
		DWG NO. SMA-502-156				DATE. 06/MAR/2009



DONGJIN TI.

CUSTOMER