

1

2

3

4

5

6

SPECIFICATIONS;

Impedance : 50 Ohms

Frequency Range :DC~18 GHz

Directric Withstanding Voltage : 750 VRMS

Insulation Resistance : 5000 meghms

Temperture Range : -55~125°C

VSWR : 1.2:1 max @ 18GHz

No.	Revision	Date	Name
1	PN Change from 1S-501SG-0025	14/FEB/2014	S.J.PARK
2			

1/4-36UNS-2A

EPOXY


1.65

9.5

2.5

12

Tab 0.15thick x 1.27 wide

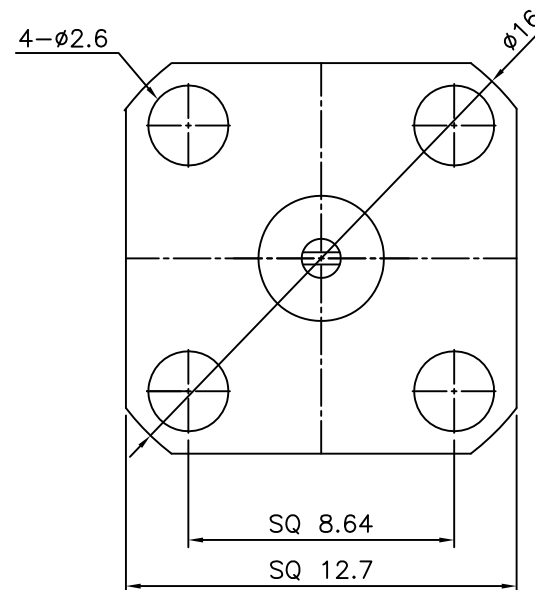

SMA-4H Flange Mount
JACK Receptacle/Tab Contact
(Epoxy-Captive Contact)

Connector parts	Materials	Finish
Body	Stainless steel	Gold Plated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

CUSTOMER

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SMA-504-054	NAME	SMA-4H-JACK RECEP	APPROVED	
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05	ANGLES ±1°	CHECKED
SCALE	UNIT	mm	DESIGNED	S.J.LEE	
DWG NO.	SMA-504-054	DATE.	09/FEB/2006		



DONGJIN TI.