
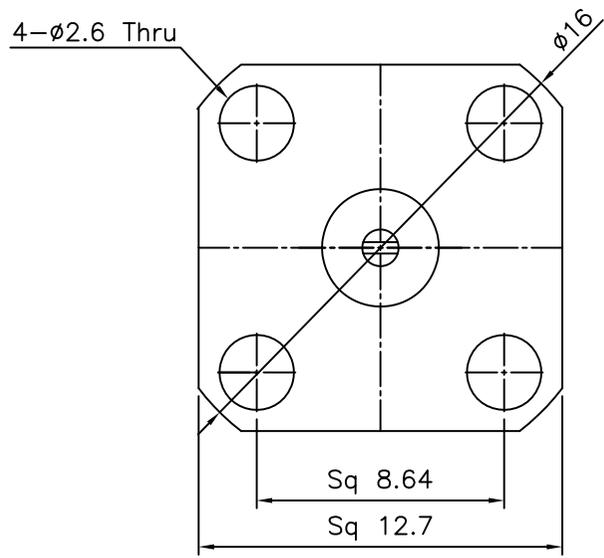


No.	Revision	Date	Name
1	PN Change from 1S-501S-0025E	17/FEB/2014	S.J.PARK
2			

SPECIFICATIONS;  
 Impedance : 50 Ohms  
 Frequency Range : DC~18 GHz  
 Directric Withstanding Voltage : 750 VRMS  
 Insulation Resistance : 5000 meghms  
 Temperture Range : -55~125°C  
 VSWR : 1.2:1 max @ 18GHz

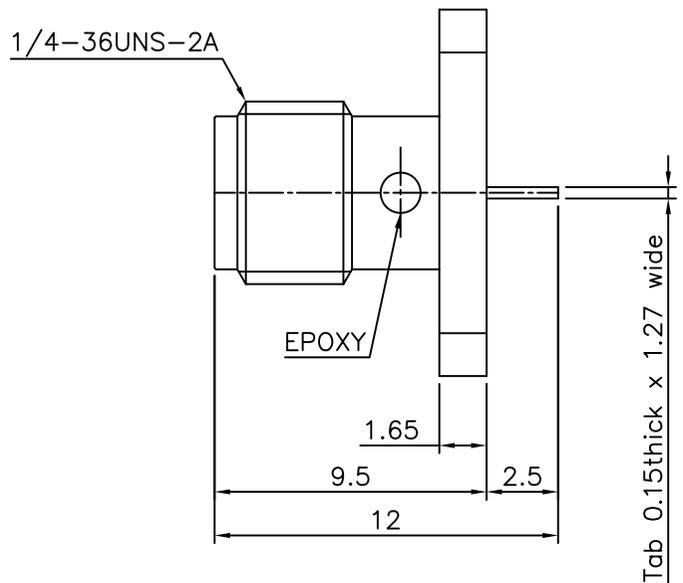

SMA-4H Flange Mount  
 JACK Receptacle/Tab Contact  
 ( Epoxy-Captive Contact)

Connector parts	Materials	Finish
Body	Stainless steel	Passivated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SMA-504-176		NAME	SMA-4H-JACK RECEPTACLE	APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05		ANGLES ±1°	CHECKED
		SCALE	UNIT		DESIGNED S.J.LEE
			mm		DATE. 06/DEC/2013
		DWG NO.		SMA-504-176	

CUSTOMER



D  
C  
B  
A