No.	Revision	Date	Name
1	PN Change from 1S-804-02	26/06/2013	B.G.YUN

SPECIFICATIONS;

IMPEDANCE : 50 Ohms

Frequency Range : DC~18GHz


Working Voltage : 1000 VRMS


Insulation Resistance : 5000M ohms min.

Temperture Range : -55°~155°C

VSWR : DC~18 GHz : ≤ 1.20

RoHS Compliant

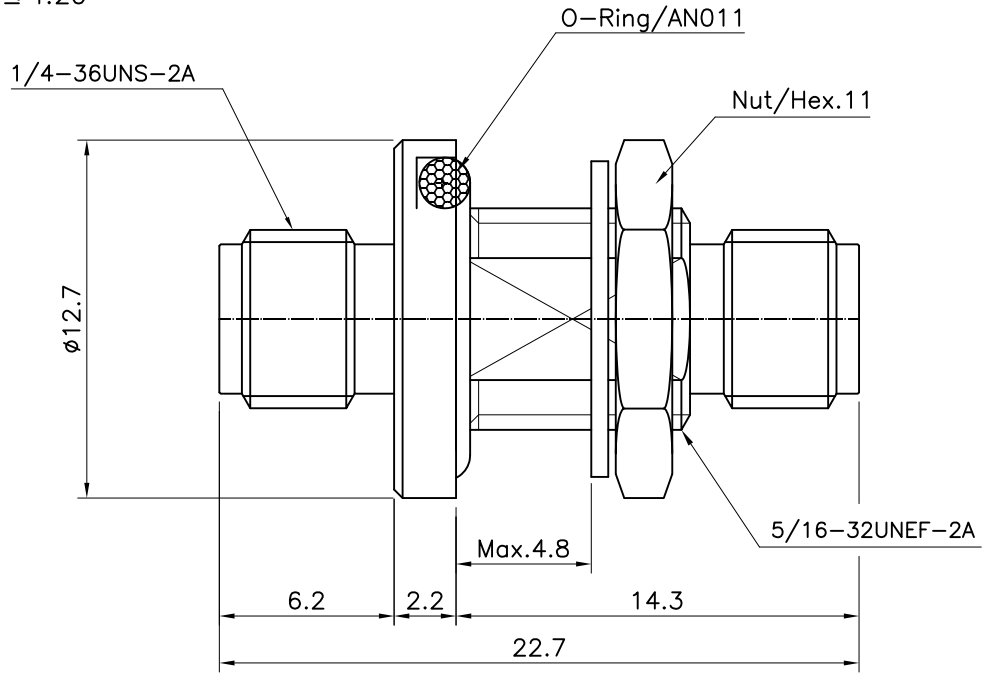

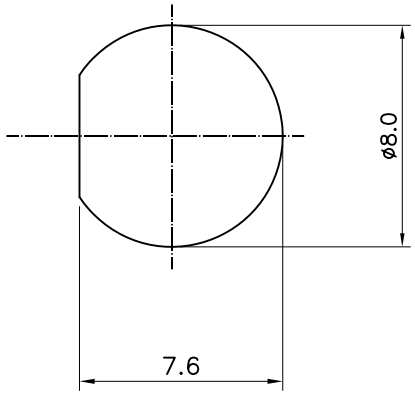

MOUNT HOLES

SMA Bulkhed JACK to JACK
ADAPTOR with SEAL(IP67)

Connector parts	Materials	Finish
Body,Nut,Washer	Brass	Gold plated
Center contact	Beryllium copper	Gold plated
Insulator	PTFE	-
O-Ring	Silicone rubber	-

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SMA-804-004	NAME	SMA-B/H-JJ-ADAPTOR		APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05 ANGLES ±1°			CHECKED
		SCALE	UNIT mm		DESIGNED S.J.LEE
CUSTOMER	DONGJIN TI.	DWG NO.	SMA-804-004		DATE 23/AUG/2007