
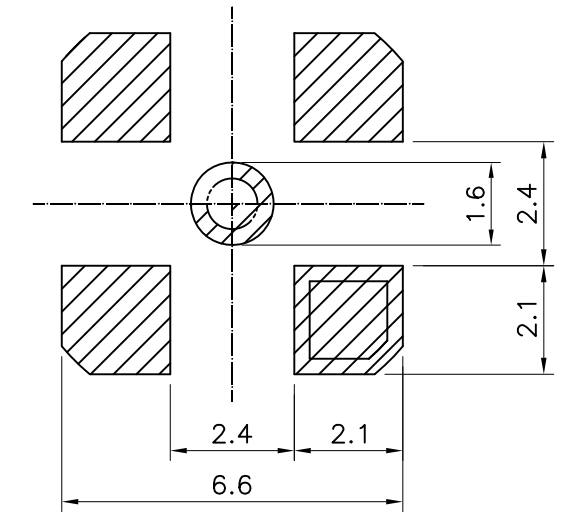
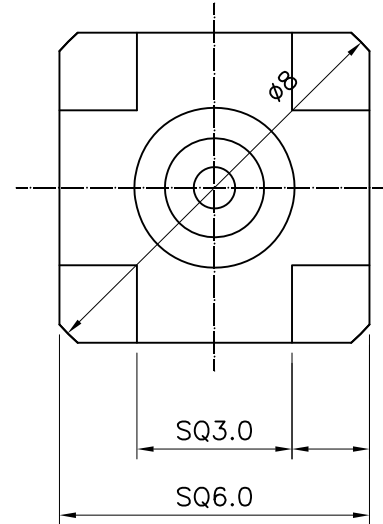


No.	Revision	Date	Name
△			
△			

RoHS Compliant

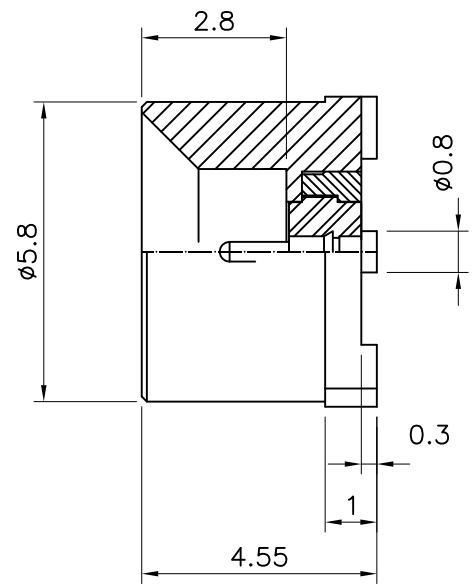

SMT-Location
Solderpad Layout

Electrical Data
 Impedance : 50 OHm
 Frequency range : DC~10 GHz
 Contact current : DC 1.2A MAX.
 Working voltage : 300V RMS
 V.S.W.R : ≤1.20
 Temperature range : -65°C~+125°C

SMP Straight-MALE SMT PCB(50 Ohm)
(SMOOTH BORE)

Item	Materials	Plating
Body	Brass	Gold Plated 0.76micron
Center contact	Beryllium copper	Gold Plated 1.27micron
Insulator	PTFE	-

CUSTOMER

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SMP-601-003	NAME	SMP-MALE-PCB(SB)	APPROVED	
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05	ANGLES ±1°	CHECKED
SCALE	UNIT	mm	DESIGNED	S.J.LEE	
DWG NO.	SMP-601-003	DATE.	21/OCT/2013		

