

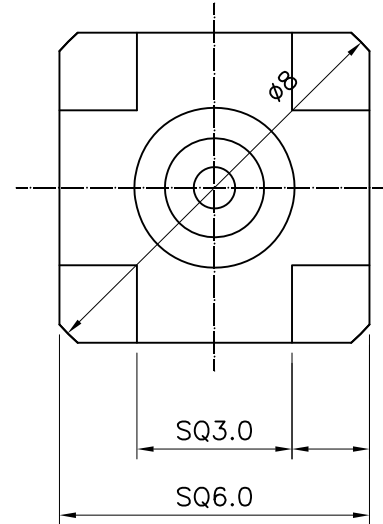


No.	Revision	Date	Name
△			
△			

RoHS Compliant

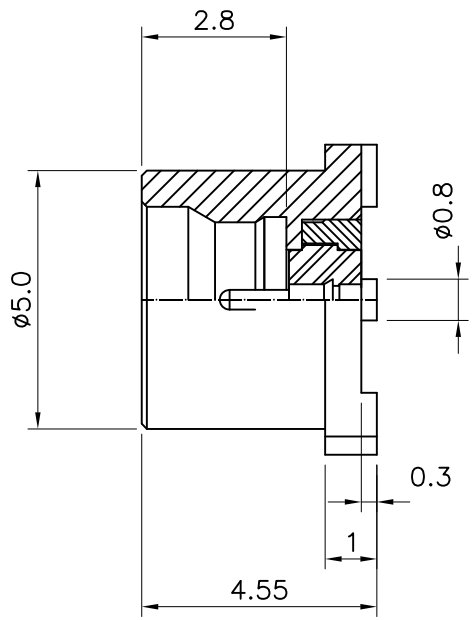

4-SQ1.5

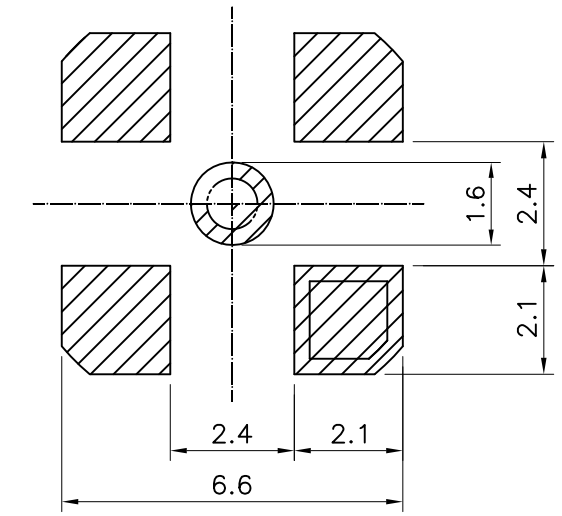

SMT-Location
Solderpad Layout

Electrical Data
Impedance : 50 OHm
Frequency range : DC~10 GHz
Contact current : DC 1.2A MAX.
Working voltage : 300V RMS
V.S.W.R : ≤1.20
Temperature range : -65°C~+125°C

SMP Straight-MALE SMT PCB(50 Ohm)
(FULL DETENT)

Item	Materials	Plating
Body	Brass	Gold Plated 0.76micron
Center contact	Beryllium copper	Gold Plated 1.27micron
Insulator	PTFE	-

CUSTOMER

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SMP-601-004	NAME	SMP-MALE-PCB(FD)	APPROVED	
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05	ANGLES ±1°	CHECKED
SCALE	UNIT	mm	DESIGNED	S.J.LEE	
DWG NO.	SMP-601-004	DATE.	21/OCT/2013		

DONGJIN TI.