



No.	Revision	Date	Name
△			
△			

RoHS Compliant

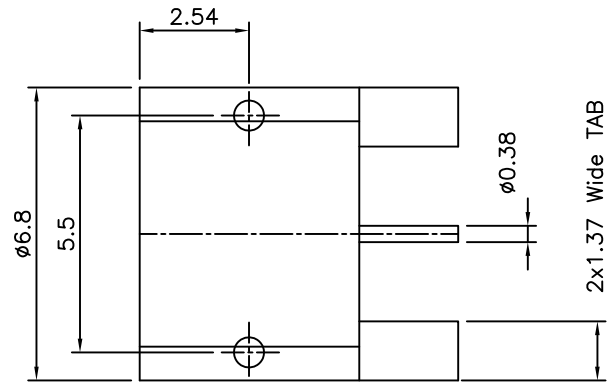

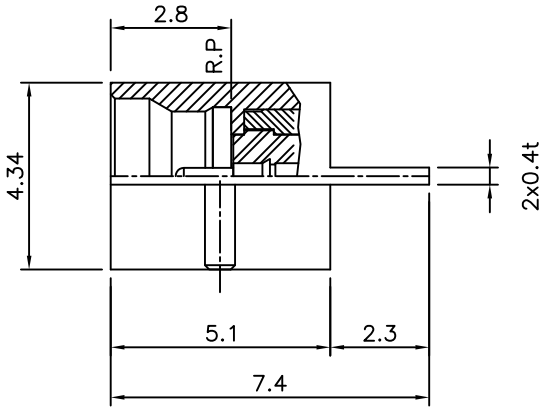

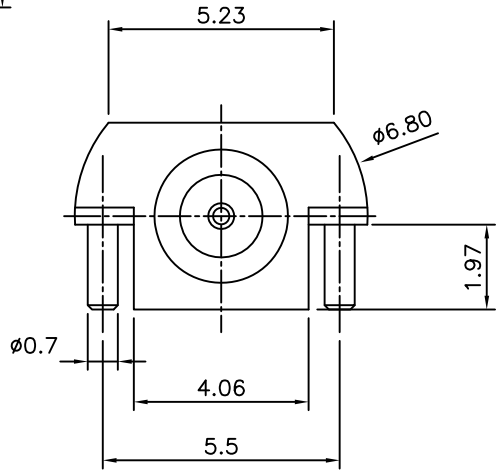

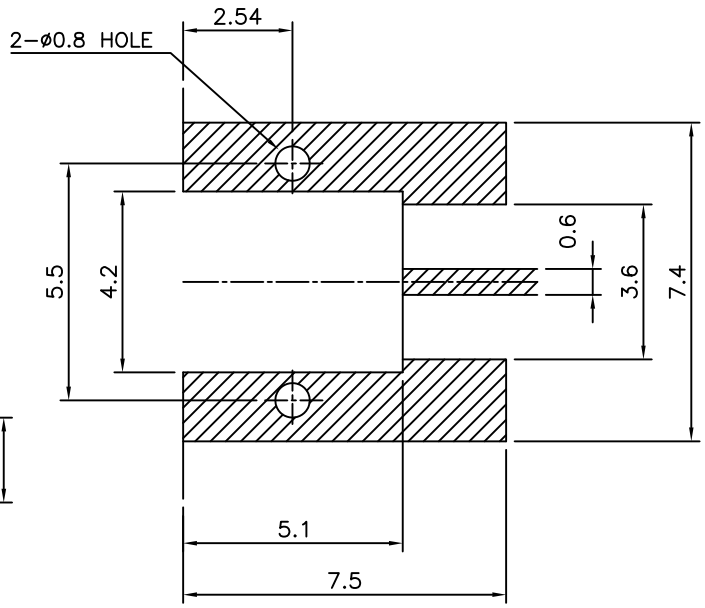

SOLDER PAD LAYOUT

Electrical Data
Impedance : 50 OHm
Frequency range : DC~10 GHz
Contact current : DC 1.2A MAX.
Working voltage : 300V RMS
V.S.W.R : ≤1.20
Temperature range : −65°C~+125°C

Item	Materials	Plating
Body	Brass	Gold Plated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	−

SMP Straight−MALE PCB(50 Ohm)
edge mount−2PIN
(LIMITED DETENT)

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SMP−601−005	NAME	SMP−MALE−PCB(LD)		APPROVED
MATERIAL	FINISH	TOLERANCES	OTHERWISE SPEC. ±0.05 ANGLES ±1°		CHECKED
		SCALE	UNIT mm		DESIGNED S.J.LEE
CUSTOMER	DONGJIN TI.	DWG NO.	SMP−601−005		DATE. 06/NOV/2013