


No.	Revision	Date	Name
1	PN Change from 1MC-3111-003HS	04/02/2014	B.G.YUN
2	PN Change from SSMC-310-003	10/02/2014	B.G.YUN

ELECTORICAL RATINGS

Impedance : 50 ohm
 Frequency Range : DC~12.4GHz
 V.S.W.R : 1.20 +0.03xF(GHz)
 Insertion loss : 0.3dB@1.5GHz
 Working Voltage : 250 VRMS max
 Dielectric Withstanding Voltage : 750V min
 Insulation Resistance : 1000MQ min
 Temperature range : -55~+145°C

RoHS Compliant

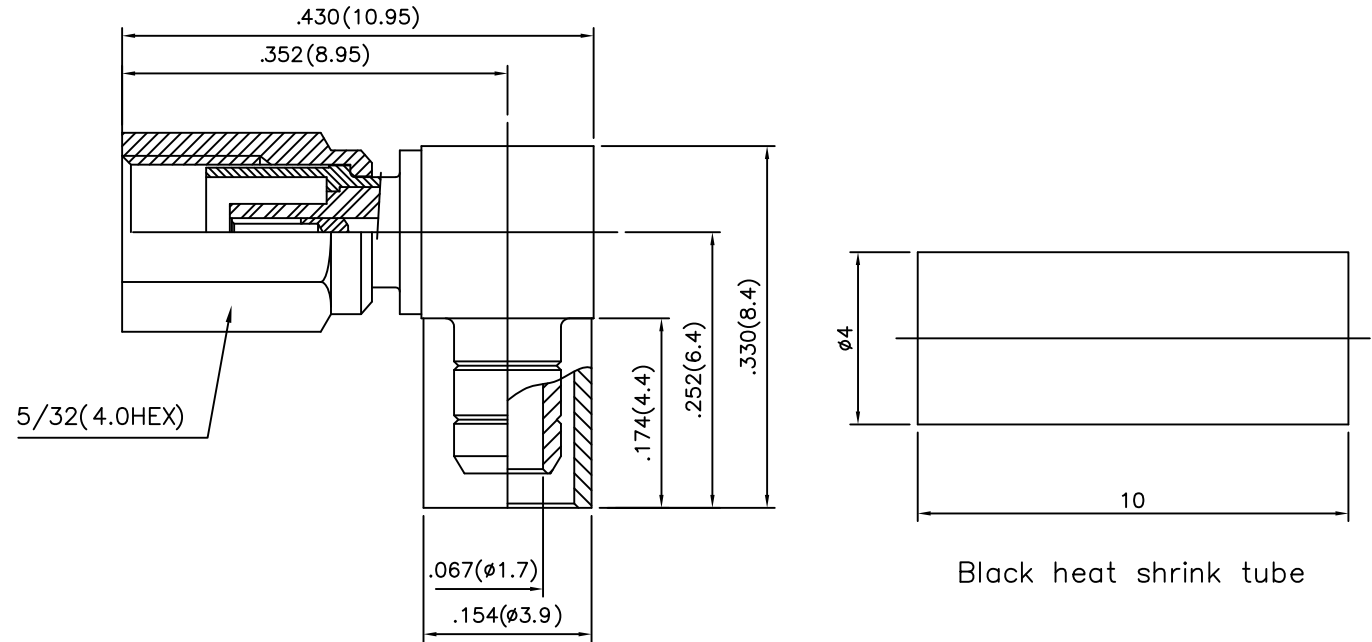

Black heat shrink tube

SSMC Right Angle Cable Plug
for RG316 Crimp

Connector parts	Materials	Finish
Body,Coupling	BRASS	Gold Plated
Center contact	Beryllium copper	Gold Plated
Insulator	Teflon	
Ferrule	BRASS	Gold Plated

CUSTOMER

NO.	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS.
PARTS No.	SSMC-311-002		NAME	SSMC-LP316	APPROVED
MATERIAL	FINISH	TOLERANCES OTHERWISE SPEC. ±0.05		ANGLES ±1°	CHECKED
		SCALE	UNIT mm		DESIGNED S.J.LEE
		DWG NO.		SSMC-311-002	DATE. 02/MAR/2008